


CELL CHARACTERISTICS

| | | |
|------------------------------|----------------|---------------|
| Capacity | Typical | 3450 mAh |
| | Minimum | 3350 mAh |
| Cell Voltage | Nominal | 3.6 V |
| | Charge | 4.2 V |
| Continuous Charge Current | Standard | 1.7 A |
| | Maximum | 3.4 A |
| Charge Time | Standard | 2.5 hr |
| Continuous Discharge Current | Maximum | 10 A |
| | Charge | 0°C to 60°C |
| Ambient Temperature | Discharge | -40°C to 60°C |
| | Energy Density | Volumetric |
| Gravimetric | | 250 Wh/kg |

PHYSICAL CHARACTERISTICS




| | |
|----------|---------------|
| Shape | Cylindrical |
| Can | Steel |
| Diameter | 18.6 mm (Max) |
| Height | 65.2 mm (Max) |
| Weight | 48 g (Max) |


The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice.

For application specific information, please contact E-One Moli Energy Sales and Applications or the nearest MOLICEL® recognized agent.


Charge Characteristics

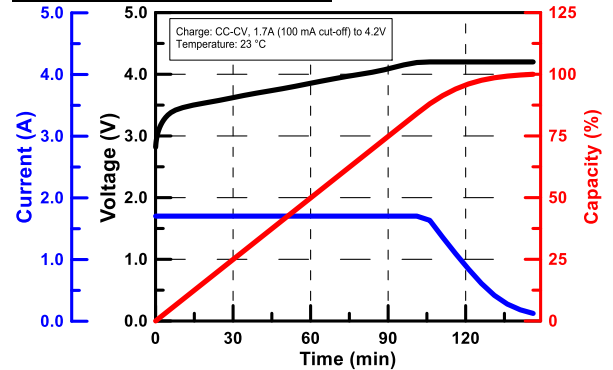

Discharge Rate Characteristics at 23°C

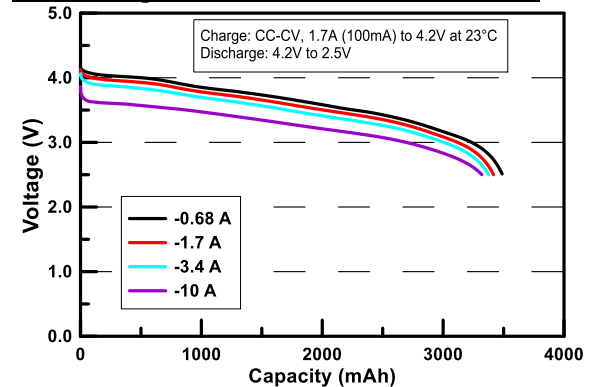

Discharge Temperature Characteristics

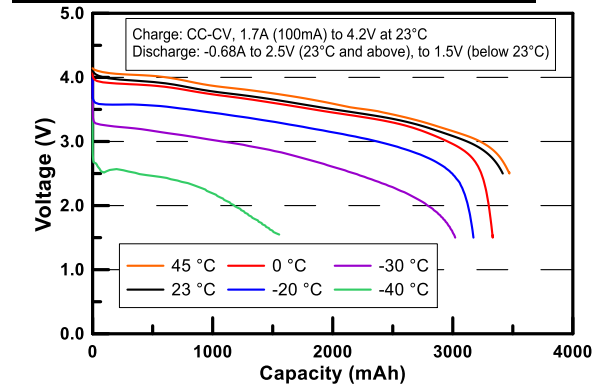

Cycle Characteristics

